

# WIRELESS TELEMETRY LOAD DISPLAY

## DESCRIPTION

The Wireless Telemetry Load Display allows users to perform advanced operations with load link and load cell readings for local monitoring. It can be configured to perform individual load link/ load cell measurements or in combinations to show such things as bow or stern load when lifting boats or as a total load measurement.




## SPECIFICATIONS

- Range of 800m
- Supports two modes of operation –
  - Pre-configured list (Define a set of up to 24 telemetry modules, such as load links, load pins etc. and configure overload and under load values)
  - Summing groups (Add the value of two or more telemetry modules together)
- Sealed to IP67 in a robust handheld enclosure
- ATEX version available

## FEATURES & BENEFITS

- Simple operator interface
- Overload indication and alarm
- User controlled backlight
- Tare/ Zero/ Gross functions
- Uses readily available Energizer L91 batteries
- Long battery life: 50 days at 12 sessions of 5 minutes per day; 54 hours continuous
- Operating temperature range of -10°C to +50°C

## DIMENSIONS

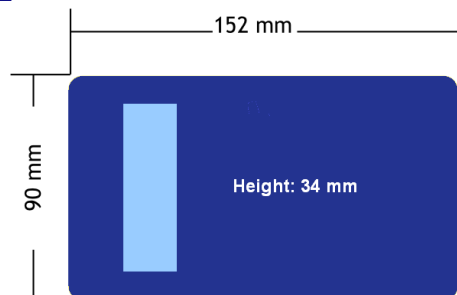

Advanced Witness Systems Ltd © 2022

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: +44 (0)1295 266939  
Email: sales@awstorque.co.uk

### SUPPLIER INFORMATION