

# 1Nm ANALOGUE IN-LINE TORQUE TRANSDUCER

## DESCRIPTION

The AWS LTD Analogue In-Line Torque Transducer range (AITT), is designed to accurately measure torque values, in a variety of industries.

With optimized torque ranges, the transducer uses a standard analogue connection through a male MIL C connector, from a full active Wheatstone bridge, outputting a mV/V reading.

There is an option (using the In-line Transducer Mounting Bracket, purchased separately) to bench mount the transducer in either a vertical or horizontal position. The vertical position allows it to be mounted in ISO torque wrench calibration machines.

This transducer can either be Male SQ drive to Male SQ drive or Male SQ to Male HEX drive. There are 2x M4 threaded holes in the reaction end and bottom surfaces for bolting.

## SPECIFICATIONS

Model: AITT-	2112	2112H	2111	2111H	2018	2018H
<b>Ranges:</b>	0.01 – 0.25Nm	0.01 – 0.25Nm	0.02 - 0.5Nm	0.02 - 0.5Nm	0.04 – 1Nm	0.04 – 1Nm
<b>Drive Size:</b>	1/4" SQ	1/4" HEX	1/4" SQ	1/4" HEX	1/4" SQ	1/4" HEX



Accuracy:	Better than 0.1% of reading from 10 to 100% of rated output. See calibration certificate for full results.
Signal output	2 mV/V Strain gauge
Communication:	mV
Overload Capacity:	120%
Bridge Impedance	350 Ω
MAX voltage and current requirement	10V DC 30mA
Power and Display:	Dedicated mV/V display and power supply.
Maximum mechanical overload:	150%
Operating Temperature:	-10°C to +50°C.
Connector:	Mil C 26482 series. 6 pin. Shell size 10.
CE:	2014/30/EU
EMC:	BS EN 61326:2007



## DIMENSIONS

Dimensions for AITT-2112 available on request.

Model	Dimension								
	A	B	C	D	E	F	G	H	I
AITT-2111	82	53	40	25	25	10	12	16	44
AITT-2018	82	53	40	25	25	10	12	16	44

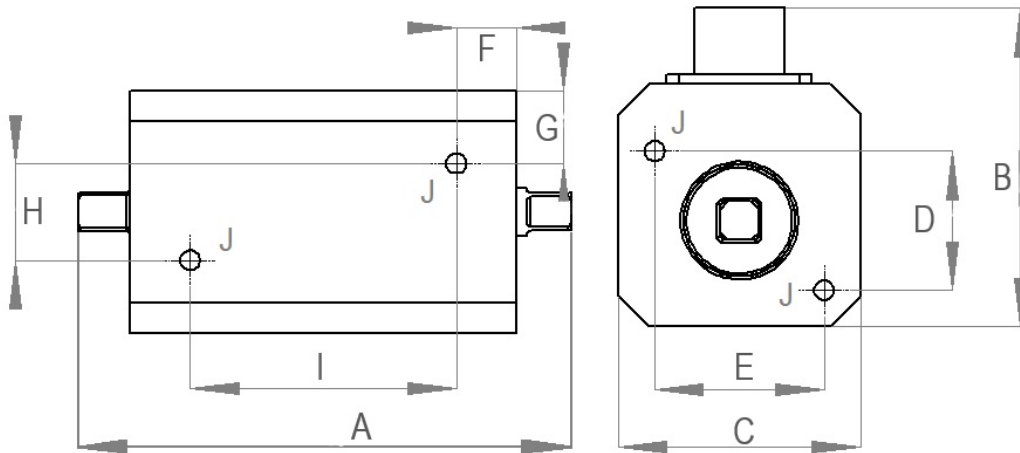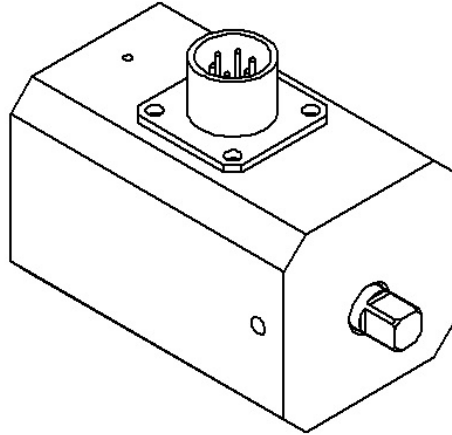

Mounting Tapped Hole "J"	Square Drive	Weight (Kg)
M4	Male 1/4"	0.3

Advanced Witness Systems Ltd © 2025

MANUFACTURER INFORMATION	SUPPLIER INFORMATION
Advanced Witness Systems Ltd Unit 8 Beaumont business Centre Beaumont Close Banbury OX16 1TN Tel: +44 (0)1295 266939 Email: sales@awstorque.co.uk	